



Genoa

CH-10000~CH-10021

Our Genoa fixtures are real light engines. Their job is to broadcast light through the shadows. The fixtures themselves are attractive but the light they produce is much more important than their looks. Gigantic foot candle levels can be achieved by proper placement of these lights. Where side illumination might be a glare issue with a lighted acrylic or glass fixture, our Genoa's will produce directional flood and up lighting without compromise. Many color and reflector options to choose from. And our LED models will be one of the wisest investments you could make...just right!

~Genoa Series~

Chandelier: CH-10000~CH-10021

Pendant: PD-10000~PD-10031

Ceiling Mt: CL-10000~CL-10007

Wall Mt: SC-10000~SC-10011

Bollard: BL-10000~BL-10011

Mounting: Lightsmith fixtures mount to standard 4" octagon electrical boxes unless otherwise specified. All hardware and canopies supplied.

Listing and Warranty: Lightsmith fixtures are Underwriters Laboratories listed and carry a standard three year warranty against defects in materials and labor beginning at date of shipment.



Fixture Specifications

CH-100
FIXTURE NUMBER
(Example: CH-10002)

~ REFLECTOR
(Example: CLR)


~ METAL FINISH
(Example: ABB)

~ VOLTAGE
 (120V)
 (277V)
 (347V)

~ **NR**
STEM=S+Lgth
(Example: S-96")
CHAIN=C+Lgth
(Example: C-96")
NR=Not required

~ OPTIONS
(Example: REM)

~ MODIFICATIONS
(Example: Custom Paint*)
Use "Notes" Box At Top To Explain Modifications

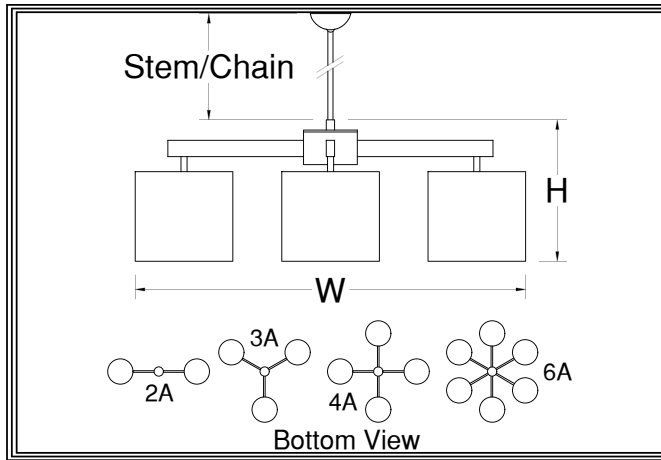

CH-100 _____
Fixture Number Job Type

Job Name

Notes~Modifications

| | Fixture Number | Dimensions/Arms | Lamps | Weight | Stem/Chain | Options |
|--------------|-----------------------------------|-----------------|---------------------------|--------|------------|---------------|
| LED | <input type="checkbox"/> CH-10009 | 36w x 16h~2A | 2-13wCled (2820 lumens) | 24 lbs | 3' Std | IEM,REM,SPR** |
| | <input type="checkbox"/> CH-10010 | 42w x 16h~3A | 3-23wCLED (8370 lumens) | 36 lbs | 6' Std | L313 |
| | <input type="checkbox"/> CH-10011 | 48w x 16h~4A | 4-38wCLED (22936 lumens) | 46 lbs | 6' Std | L323 |
| | <input type="checkbox"/> CH-10012 | 56w x 16h~4A | 4-52wCLED (37500 lumens) | 55 lbs | 6' Std | L323 |
| | <input type="checkbox"/> CH-10013 | 64w x 16h~6A | 6-83wCLED (75582 lumens) | 67 lbs | 9' Std | L323 |
| INCANDESCENT | <input type="checkbox"/> CH-10020 | 36w x 16h~2A | 2-60wA (1600 lumens) | 20 lbs | 3' Std | L38 |
| | <input type="checkbox"/> CH-10000 | 42w x 16h~3A | 3-100wA (5220 lumens) | 31 lbs | 6' Std | L38 |
| | <input type="checkbox"/> CH-10021 | 48w x 16h~4A | 4-150wA (11120 lumens) | 40 lbs | 6' Std | L52 |
| | <input type="checkbox"/> CH-10001 | 56w x 16h~4A | 4-200wPS (15640 lumens) | 51 lbs | 6' Std | L52 |
| | <input type="checkbox"/> CH-10002 | 64w x 16h~6A | 6-300wPS (30660 lumens) | 62 lbs | 9' Std | L83 |
| FLUORESCENT | <input type="checkbox"/> | | | | | |

~Single Circuit Standard Wiring~

**All LED Fixtures

| | | | |
|-----------|--|--|--------------------------|
| REFLECTOR | <input type="checkbox"/> CLR: Clear Reflector | <input type="checkbox"/> CHR: Champagne Reflector | <input type="checkbox"/> |
| | <input type="checkbox"/> GLR: Gold Reflector | <input type="checkbox"/> PTR: Pewter Reflector | |
| | <input type="checkbox"/> WHR: White Reflector | <input type="checkbox"/> UMR: Umber Reflector | |
| | <input type="checkbox"/> GMR: Gun Metal Reflector | <input type="checkbox"/> STR: Straw Reflector | |
| | <input type="checkbox"/> WTR: Wheat Reflector | <input type="checkbox"/> BLR: Black Reflector | |
| | | | |
| | | | |
| | | | |

| | SOLID BRASS FINISHES | PAINTED METAL FINISHES | ALUMINUM FINISHES | STAINLESS STEEL FINISHES |
|--------------|--|---|--|---|
| METAL FINISH | <input type="checkbox"/> ABB: Antique Brass | <input type="checkbox"/> DGP: Dark Green | <input type="checkbox"/> SAA: Satin Aluminum | <input type="checkbox"/> SSS: Satin |
| | <input type="checkbox"/> SBB: Satin Brass | <input type="checkbox"/> VGP: Verde Green | <input type="checkbox"/> SNA: Satin Nickel | <input type="checkbox"/> DSS: Distressed |
| | <input type="checkbox"/> PBB: Polished Brass | <input type="checkbox"/> CGP: Charcoal Gray | <input type="checkbox"/> PAA: Polished Aluminum | <input type="checkbox"/> PSS: Polished |
| | <input type="checkbox"/> ANB: Antique Nickel | <input type="checkbox"/> MBP: Medium Bronze | <input type="checkbox"/> BBA: Burnished Bronze | <input type="checkbox"/> HSS: Hammered |
| | <input type="checkbox"/> SNB: Satin Nickel | <input type="checkbox"/> SBP: Satin Black | <input type="checkbox"/> RNA: Red Naval Bronze | <input type="checkbox"/> |
| | <input type="checkbox"/> PNB: Polished Nickel | <input type="checkbox"/> DBP: Dark Bronze | <input type="checkbox"/> SGA: Satin Gold | <input type="checkbox"/> |
| | <input type="checkbox"/> AZB: Antique Bronze | <input type="checkbox"/> LBP: Light Bronze | <input type="checkbox"/> SBA: Satin Bronze | <input type="checkbox"/> |
| | <input type="checkbox"/> SZB: Satin Bronze | <input type="checkbox"/> MGP: Medium Gold | <input type="checkbox"/> ORA: Oil Rubbed Bronze | <input type="checkbox"/> |
| | <input type="checkbox"/> PZB: Polished Bronze | <input type="checkbox"/> SCP: Sponged Copper | <input type="checkbox"/> SCA: Satin Copper | <input type="checkbox"/> |
| | <input type="checkbox"/> CSB: Custom Brass* | <input type="checkbox"/> CSP: Custom Paint* | <input type="checkbox"/> CSA: Custom Aluminum* | <input type="checkbox"/> CSS: Custom SS* |
| | | | | |
| | | | | |
| | | | | |
| | | | | |

| | | | |
|---------|--|---|--|
| OPTIONS | <input type="checkbox"/> L38: 38wLED R40 Downlt | <input type="checkbox"/> L313: 3-13wCLED Uplight | <input type="checkbox"/> SPR: Surge protector |
| | <input type="checkbox"/> L52: 52wLED R40 Downlt | <input type="checkbox"/> L323: 3-23wCLED Uplight | <input type="checkbox"/> IEM: Integral Emer. Driver |
| | <input type="checkbox"/> L83: 83wLED R40 Downlt | <input type="checkbox"/> | <input type="checkbox"/> DIM: Dimming Driver (std) |
| | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> REM: Remote Emer.Driver |
| | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |