



Netten

PD-6100~PD-6131

Our Netten fixtures are ring fixtures with a twist...they are not contemporary at all. So maybe they start life as a basic square edged channel. But, at the end, they have been overlaid with four different gothic/romanesque filigrees and acanthus leaf bottom scrolls. Light from these fixtures is totally indirect, spilling out the top of the body channel and onto the ceiling. While the profile is basically narrow, with the right lamping options...and especially LED CoB chips, these lights can provide great illumination. Wonderful colors available as well as suspension and lamping options!

~Netten Series~

- Chandelier: CH-6100~CH-6111
- Pendant: PD-6100~PD-6131**
- Ceiling Mount: CL-6100~CL-6108
- Wall Mount: SC-6100~SC-6111
- Bollard: BL-6100~BL-6111


Mounting: Lightsmith fixtures mount to standard 4" octagon electrical boxes unless otherwise specified. All hardware and canopies supplied.

Listing and Warranty: Lightsmith fixtures are Underwriters Laboratories listed and carry a standard three year warranty against defects in materials and labor beginning at date of shipment.



Fixture Specifications

PD-61 <small>FIXTURE NUMBER (Example: PD-6100)</small>	~	NR <small>DIFFUSER (Example: BGA-ECH)</small>	~	<small>METAL FINISH (Example: ABB)</small>	~	<small>VOLTAGE</small> <input type="checkbox"/> (120V) <input type="checkbox"/> (277V) <input type="checkbox"/> (347V)	~	<small>STEM=S+Lgth (Example: S-96") CHAIN=C+Lgth (Example: C-96") NR=Not required</small>	~	<small>OPTIONS (Example: DIM, REM)</small>	~	<small>MODIFICATIONS (Example: Custom Paint) Use "Notes" Box At Top To Explain Modifications</small>
--	---	---	---	--	---	---	---	---	---	--	---	---

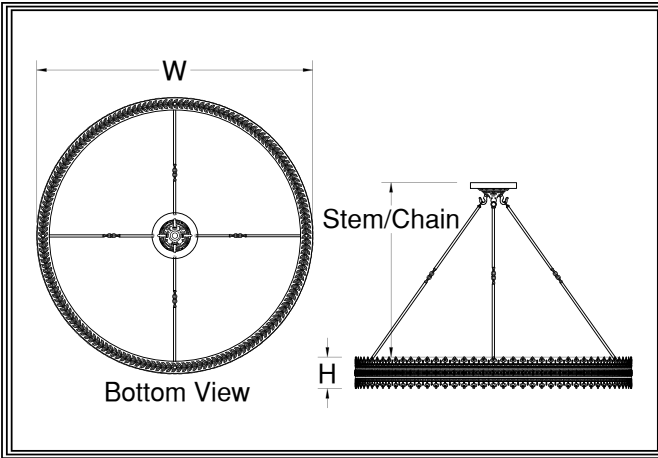

PD-61

Fixture Number Job Type

Job Name

Notes~Modifications

	Fixture Number	Dimensions	Lamping	Weight	Stem/Chain	Options
LED	<input type="checkbox"/> PD-6109	24w x 6h	4-13wCLED (5640 lumens)	29 lbs	3' Std	DALI, IEM, TPL, FUS**
	<input type="checkbox"/> PD-6110	36w x 6h	6-13wCLED (8460 lumens)	42 lbs	6' Std	L423, L623
	<input type="checkbox"/> PD-6111	48w x 6h	12-13wCLED (16920 lumens)	55 lbs	9' Std	L423, L623
	<input type="checkbox"/> PD-6112	72w x 6h	18-13wCLED (25380 lumens)	68 lbs	9' Std	L623, L823
	<input type="checkbox"/> PD-6113	96w x 6h	24-13wCLED (33840 lumens)	85 lbs	12' Std	L623, L823
INCANDESCENT	<input type="checkbox"/> PD-6120	24w x 6h	4-60wA (3200 lumens)	24 lbs	3' Std	N250
	<input type="checkbox"/> PD-6100	36w x 6h	6-60wA (4800 lumens)	36 lbs	6' Std	N300
	<input type="checkbox"/> PD-6121	48w x 6h	12-60wA (9600 lumens)	50 lbs	9' Std	N300
	<input type="checkbox"/> PD-6101	72w x 6h	18-60wA (14400 lumens)	64 lbs	9' Std	N500
	<input type="checkbox"/> PD-6102	96w x 6h	24-60wA (19200 lumens)	80 lbs	12' Std	N500
FLUORESCENT	<input type="checkbox"/> PD-6130	24w x 6h	4-13wCFQ (3600 lumens)	27 lbs	3' Std	DIM, IEM, TPL, FUS*
	<input type="checkbox"/> PD-6103	36w x 6h	6-13wCFQ (5400 lumens)	41 lbs	6' Std	F242
	<input type="checkbox"/> PD-6131	48w x 6h	12-13wCFQ (10800 lumens)	53 lbs	9' Std	F242
	<input type="checkbox"/> PD-6104	72w x 6h	18-13wCFQ (16200 lumens)	66 lbs	9' Std	F442
	<input type="checkbox"/> PD-6105	96w x 6h	24-13wCFQ (21600 lumens)	83 lbs	12' Std	F442

~One Circuit Standard Wiring~

*All Fluorescent Fixtures
**All LED Fixtures

DIFFUSER	<input type="checkbox"/> NA <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
----------	---	--

	SOLID BRASS FINISHES	PAINTED METAL FINISHES	ALUMINUM FINISHES	STAINLESS STEEL FINISHES
METAL FINISH	<input type="checkbox"/> ABB: Antique Brass	<input type="checkbox"/> DGP: Dark Green	<input type="checkbox"/> SAA: Satin Aluminum	<input type="checkbox"/> NA
	<input type="checkbox"/> SBB: Satin Brass	<input type="checkbox"/> VGP: Verde Green	<input type="checkbox"/> SNA: Satin Nickel	<input type="checkbox"/>
	<input type="checkbox"/> PBB: Polished Brass	<input type="checkbox"/> CGP: Charcoal Gray	<input type="checkbox"/> PAA: Polished Aluminum	<input type="checkbox"/>
	<input type="checkbox"/> ANB: Antique Nickel	<input type="checkbox"/> MBP: Medium Bronze	<input type="checkbox"/> BBA: Burnished Bronze	<input type="checkbox"/>
	<input type="checkbox"/> SNB: Satin Nickel	<input type="checkbox"/> SBP: Satin Black	<input type="checkbox"/> RNA: Red Naval Bronze	<input type="checkbox"/>
	<input type="checkbox"/> PNB: Polished Nickel	<input type="checkbox"/> DBP: Dark Bronze	<input type="checkbox"/> SGA: Satin Gold	<input type="checkbox"/>
	<input type="checkbox"/> AZB: Antique Bronze	<input type="checkbox"/> LBP: Light Bronze	<input type="checkbox"/> SBA: Satin Bronze	<input type="checkbox"/>
	<input type="checkbox"/> SZB: Satin Bronze	<input type="checkbox"/> MGP: Medium Gold	<input type="checkbox"/> ORA: Oil Rubbed Bronze	<input type="checkbox"/>
	<input type="checkbox"/> PZB: Polished Bronze	<input type="checkbox"/> SCP: Sponged Copper	<input type="checkbox"/> SCA: Satin Copper	<input type="checkbox"/>
	<input type="checkbox"/> CSB: Custom Brass*	<input type="checkbox"/> CSP: Custom Paint*	<input type="checkbox"/> CSA: Custom Aluminum*	<input type="checkbox"/>

OPTIONS	<input type="checkbox"/> N250: 250wPar38 Downlight	<input type="checkbox"/> L423: 4-23wCLED Downlight	<input type="checkbox"/> FUS: Fusing
	<input type="checkbox"/> N300: 300wPar56 Downlight	<input type="checkbox"/> L623: 6-23wCLED Downlight	<input type="checkbox"/> IEM: Integral Emer. Ballast
	<input type="checkbox"/> N500: 500wPar56 Downlight	<input type="checkbox"/> L823: 8-23wCLED Downlight	<input type="checkbox"/> DALI: Dali dimming LED
	<input type="checkbox"/> DIM: Dimming Ballast	<input type="checkbox"/>	<input type="checkbox"/> F242: 2-42wCFT Downlight
	<input type="checkbox"/> TPL: Top Lens	<input type="checkbox"/>	<input type="checkbox"/> F442: 4-42wCFT Downlight