

CH-7200~CH-7211

Our Paris fixtures come in basic configurations: ceiling, pendant, chandelier, etc. They feature tilting gimbal ring holders that also spin up to 358° for complete aiming options. The single ceiling and wall units are compact flood and spot lights, meant for independent aiming adjustments including left and right of stage areas. Paris comes in a variety of colors, grill diffusers, and lamping options. For difficult-to-access areas, we strongly recommend you consider our LED options. The chips and reflectors we use will make focusing a dream. And the LED's themselves will make lamp maintenance a thing of the past.

~Paris Series~

Chandelier: CH-7200~CH-7211

Pendant: PD-7200~PD-7231

Ceiling Mt: CL-7200~CL-7211

Wall Mt: SC-7200~SC-7211

Bollard: BL-7200~BL-7211

Mounting:Lightsmith fixtures mount to standard 4" octagon electrical boxes unless otherwise specified. All hardware and canopies supplied.

Listing and Warranty: Lightsmith fixtures are Underwriters Laboratories listed and carry a standard three year warranty against defects in materials and labor beginning at date of shipment.











CH-72 FIXTURE NUMBER (Example: CH-7202)

DIFFUSER (Example: HNL)



Fixture Number

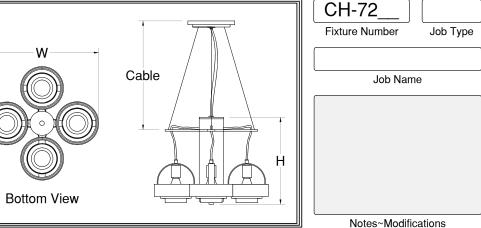

Dimensions Weight **Options** Lamping Cable CH-7200 | 25w x 14h | 19 lhs 4' Std L131.BLC.BLR.CEM 4-23wCLED (2790 lumens)

	O11-7200	20W X 1711	4 20WOLLD (2790 lumens)		+ Olu	
	CH-7201	32w x 14h	6-38wCLED (4555 lumens)	24 lbs	6' Std	L331,BLC,BLR,CEM
	CH-7202	36w x 18h	4-52wCLED (6070 lumens)	31 lbs	8' Std	L431,BLC,BLR,CEM
	CH-7203	42w x 18h	6-83wCLED (8650 lumens)	34 lbs	10' Std	L531,BLC,BLR,CEM
						DALI,REM,FUS**
	CH-7204	25w x 14h	4-150wP38 (1740 lumens)	14 lbs	4' Std	NA
닏			,			
SCE	Ŭ CH-7205	32w x 14h	6-200wP46 (2270 lumens)	20 lbs	6' Std	NA
	☐ CH-7206	36w x 18h	4-300wP56 (3840 lumens)	25 lbs	8' Std	NA
NCANDESCENT	CH-7207	42w x 18h	6-500wP64 (5500 lumens)	30 lbs	10' Std	NA
E	CH-7208	25w x 14h	4-26wCFT (1800 lumens)	18 lbs	4' Std	BLC,BLR,CEM
SCE	CH-7209	32w x 14h	6-32wCFT (2400 lumens)	23 lbs	6' Std	BLC,BLR,CEM
ZES	CH-7210	36w x 18h	4-42wCFT (3200 lumens)	30 lbs	8' Std	BLC,BLR,CEM
FLUORESCENT	CH-7211	42w x 18h	6-57wCFT (4300 lumens)	33 lbs	10' Std	BLC,BLR,CEM
딦						DIM,REM,FUS*

~Multiple Circuits Standard Wiring~

All Fluorescent Fixtures **All LED Fixtures

DIFFUSER	CRL:	Honeycomb Len Concentric Ring No Louver/Lens	Louver							
	SOLID	BRASS FINISHES		PAINTE	D METAL FINISHES		ALUMINUM FINISHES	STAI	NLESS S	TEEL FINISHES
	ABB:	Antique Brass		DGP:	Dark Green		SAA: Satin Aluminum	\bigcap	SSS:	Satin
	SBB:	Satin Brass		VGP:	Verde Green		SNA: Satin Nickel		DSS:	Distressed
	PBB:	Polished Brass		CGP:	Charcoal Gray		PAA: Polished Aluminum		PSS:	Polished
涺	ANB:	Antique Nickel		MBP:	Medium Bronze		BBA: Burnished Bronze		HSS:	Hammered
FINISH	SNB:	Satin Nickel		SBP:	Satin Black		RNA: Red Naval Bronze			
₹	PNB:	Polished Nickel		DBP:	Dark Bronze		SGA: Satin Gold			

CSB: Custom		———I 😑 —	ustom Aluminum*	CSS: Custom SS
BLC: Canopy BLR: Remote CEM: Canopy DIM: Dimming	Ballast	1-31wCled Downlight 3-31wCled Downlight 4-31wCled Downlight 5-31wCled Downlight	REM: Re	using emote Emer.Ballast ali dimming LED

SBA: Satin Bronze

ORA: Oil Rubbed Bronze

	~		~	CB	~	
METAL FINISH (Example: ABB)		VOLTAGE (120V)	l	Cable=CB+Lgth (Example:CB-96")		OPTIONS (Example:DIM,REM)
		(277V)				

LBP: Light Bronze

CCD. Cn

MGP: Medium Gold

MODIFICATIONS

(Example:Custom Paint*) Use "Notes" Box At Top To

Explain Modifications

(347V)

AZB: Antique Bronze

SZB: Satin Bronze