

## B<u>ombay</u>

## CL-10700~CL-10708

Our Bombay fixtures are low profile drums composed of several overlapping layers of metal or acrylic. Far from being seamless as most of our designs are, the Bombay is purposefully open at the segment joints to allow just a hint of light to pass through and add to the overall "puzzle" quality of the fixtures. You still can't look inside to see the lamps, but the construction makes you want to. We build Bombay is a variety of materials. We show metal sheet that has been overlapped with wood veneer in the pendant above. It is also available in a variety of acrylics as well.

## ~Bombay Series~

Chandelier: CH-10700~CH-10711

Pendant: PD-10700~PD-10731

Ceiling Mt: CL-10700~CL-10708

Wall Mt: SC-10700~SC-10711

Bollard: BL-10700~BL-10711

Mounting: Lightsmith fixtures mount to standard 4" octagon electrical boxes unless otherwise specified. All hardware and canopies supplied.

Listing and Warranty: Lightsmith fixtures are Underwriters Laboratories listed and carry a standard three year warranty against defects in materials and labor beginning at date of shipment.











CL-107 FIXTURE NUMBER (Example: CL-10702)

DIFFUSER (Example: BGA-ECH)



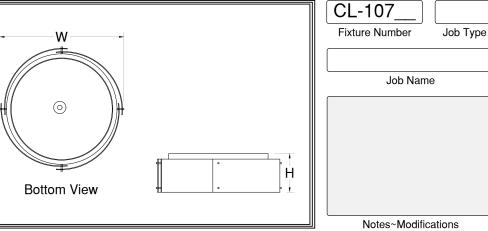

Fixture Number   CL-10706   CL-10707   CL-10708	Dimensions	Lamping	Weight	Options
	20w x 5h	4-11wCLED	11 lbs	DALI,IEM,FUS**
	24w x 6h	6-13wCLED	13 lbs	BFL,WLM
	30w x 7h	6-23wCLED	18 lbs	BFL,WLM
CL-10700  CL-10701  CL-10702	20w x 5h	3-60wA	8 lbs	BFL,WLM
	24w x 6h	6-60wA	10 lbs	BFL,WLM
	30w x 7h	12-60wA	14 lbs	BFL,WLM
CL-10703	20w x 5h 24w x 6h 30w x 7h	2-26wCFT 4-32wCFT 6-42wCFT  ~Single Circuit Standard Wiring~	10 lbs 12 lbs 17 lbs	DIM,IEM,FUS* BFL,WLM BFL,WLM

~Single Circuit Standard Wiring~

GRA: Green Edge Acrylic


\*\*All LED Fixtures

ECH: Etched\*

DIFFUSE	WHA: White Alabaster Acrylic HNA: Honey Alabaster Acrylic WOA: White Opal Acrylic	DGA: Deep Gold Acrylic SBA: Sea Blue Acrylic PHA: Purple Haze Acrylic		*Etched option creates a matte, non-glossy finish on one side of the diffuser. (Example:WOA-ECH)		
	SOLID BRASS FINISHES PAIN	NTED METAL FINISHES	ALUMINUM FINISH	ES (S	STAINLESS ST	EEL FINISHES
	ABB: Antique Brass DG	AP: Dark Green	SAA: Satin Alun	ninum	SSS:	<u>Satin</u>
	SBB: Satin Brass UG	iP: Verde Green	SNA: Satin Nick	<u>el</u>	DSS:	Distressed
	PBB: Polished Brass CG	P: Charcoal Gray	PAA: Polished Alu	<u>minum</u>	PSS:	<u>Polished</u>
FINISH	ANB: Antique Nickel MB	BP: Medium Bronze	BBA: Burnished E	Bronze	HSS:	<u>Hammered</u>
NE NE	SNB: Satin Nickel SBI	P: Satin Black	RNA: Red Naval I	Bronze		
Ħ	PNB: Polished Nickel DB	BP: Dark Bronze	SGA: Satin Gold			

$\Box$	☐ IEM:	Integral Emer. Ballast	BFL: Bottom Finial	FUS: Fusing
S	DIM:	Dimming Ballast		REM: Remote Emer.Ballast
OPTIONS				DALI: <u>Dali dimming LED</u>
尚				WLM: Wet Location Mounting
Ш				

-		~
	METAL FINISH (Example: ABB)	




LBP: Light Bronze

MGP: Medium Gold

CSP: Custom Paint\*

SCP: Sponged Copper

NR=Not required



SBA: Satin Bronze

SCA: Satin Copper

ORA: Oil Rubbed Bronze

CSA: Custom Aluminum\*

MODIFICATIONS (Example:Custom Paint\*) Use "Notes" Box At Top To Explain Modifications

CSS: Custom SS\*



**BGA:** Beige Alabaster Acrylic

AZB: Antique Bronze

PZB: Polished Bronze

CSB: Custom Brass\*

SZB: Satin Bronze