

**Nevdin**

CH-2600~CH-2631

Our Nevdin pendants and sconces are simple bowl fixtures with wonderful lamping and size options. All fixtures in the series feature heavy seamless metal spinnings and smooth acrylic bowls. The pendants also feature gracefully cascading chain motifs from the central stem down to the bowl support spinning. In the chandelier version the chains are actually structural support for the bowls at end of arms. Nevdin comes in a variety of metal finishes and acrylic types. Chandeliers are available in very large diameters (over 9') with multiple arm and lamping options.

~Nevdin Series~

Chandelier: CH-2600~CH-2631

Pendant: PD-2600~PD-2631

Ceiling Mount: CL-2600~CL-2608

Wall Mount: SC-2600~SC-2611

Bollard: BL-2600~BL-2611

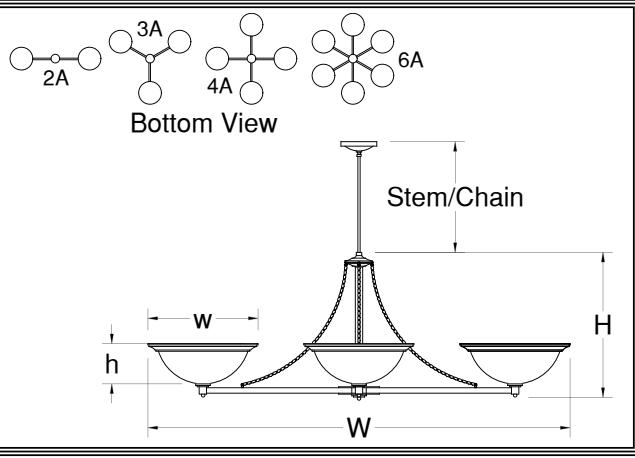
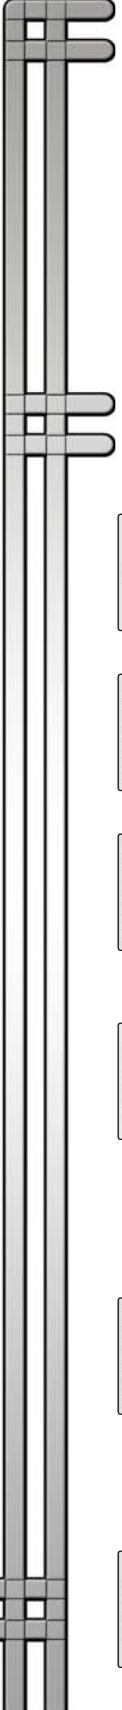
Mounting: Lightsmith fixtures mount to standard 4" octagon electrical boxes unless otherwise specified. All hardware and canopies supplied.

Listing and Warranty: Lightsmith fixtures are Underwriters Laboratories listed and carry a standard three year warranty against defects in materials and labor beginning at date of shipment.



Fixture Specifications

CH-26 / A

FIXTURE NUMBER
(Example: CH-2600)ARM QTY
(Example: 4A)~ DIFFUSER
(Example: BGA-ECH)~ METAL FINISH
(Example: ABB)~ VOLTAGE
□ (120V)
□ (277V)
□ (347V)~ STEM=S+Lgth
(Example:S-96")
CHAIN=C+Lgth
(Example:C-96")
NR=Not required~ OPTIONS
(Example:DIM,REM)~ MODIFICATIONS
(Example:Custom Paint*)
Use "Notes" Box At Top To Explain Modifications

CH-26 / A

Fixture Number

Job Type

Job Name

Notes~Modifications

Fixture Number ~ Arm Quantity	Dimensions	Lamps/Arm	Bowl	Wt/Arm	Stem/Chain	Options
CH-2609 / 2A,3A,4A,6A	60w x 16h	6-11wCLED	20w9h	19 lbs	3' Std	DALI,LEM,TPL,FUS**
CH-2610 / 2A,3A,4A,6A	74w x 20h	6-13wCLED	24w10h	21 lbs	6' Std	L423,L623
CH-2611 / 2A,3A,4A,6A	83w x 22h	6-23wCLED	28w11h	23 lbs	9' Std	L423,L623,L311
CH-2612 / 2A,3A,4A,6A	92w x 24h	6-38wCLED	30w12h	24 lbs	9' Std	L623,L823,L611
CH-2613 / 2A,3A,4A,6A	110w x 28h	6-52wCLED	36w14h	27 lbs	12' Std	L623,L823,L611
CH-2620 / 2A,3A,4A,6A	60w x 16h	3-60wA	20w9h	16 lbs	3' Std	N250
CH-2600 / 2A,3A,4A,6A	74w x 20h	3-100wA	24w10h	18 lbs	6' Std	N300
CH-2621 / 2A,3A,4A,6A	83w x 22h	4-100wA	28w11h	20 lbs	9' Std	N300
CH-2601 / 2A,3A,4A,6A	92w x 24h	6-100wA	30w12h	21 lbs	9' Std	N500
CH-2602 / 2A,3A,4A,6A	110w x 28h	6-150wA	36w14h	24 lbs	12' Std	N500
CH-2630 / 2A,3A,4A,6A	60w x 16h	2-26wCFT	20w9h	18 lbs	3' Std	DIM,LEM,TPL,FUS*
CH-2603 / 2A,3A,4A,6A	74w x 20h	4-32wCFT	24w10h	20 lbs	6' Std	F242
CH-2631 / 2A,3A,4A,6A	83w x 22h	6-32wCFT	28w11h	22 lbs	9' Std	F242
CH-2604 / 2A,3A,4A,6A	92w x 24h	6-42wCFT	30w12h	23 lbs	9' Std	F442
CH-2605 / 2A,3A,4A,6A	110w x 28h	8-42wCFT	36w14h	26 lbs	12' Std	F442

~Single Circuit Standard Wiring~

*All CFL Fixtures

**All LED Fixtures

<input type="checkbox"/> BGA: Beige Alabaster Acrylic	<input type="checkbox"/> GRA: Green Edge Acrylic	<input type="checkbox"/> ECH: Etched*
<input type="checkbox"/> NHA: Natural Horn Acrylic	<input type="checkbox"/> EGA: Earth Green Acrylic	<small>*Etched option creates a matte, non-glossy finish on one side of the diffuser. (Example: WOA-ECH)</small>
<input type="checkbox"/> WHA: White Alabaster Acrylic	<input type="checkbox"/> DGA: Deep Gold Acrylic	
<input type="checkbox"/> HNA: Honey Alabaster Acrylic	<input type="checkbox"/> SBA: Sea Blue Acrylic	
<input type="checkbox"/> WOA: White Opal Acrylic	<input type="checkbox"/> PHA: Purple Haze Acrylic	

SOLID BRASS FINISHES	PAINTED METAL FINISHES	ALUMINUM FINISHES	STAINLESS STEEL FINISHES
<input type="checkbox"/> ABB: Antique Brass	<input type="checkbox"/> DGP: Dark Green	<input type="checkbox"/> SAA: Satin Aluminum	<input type="checkbox"/> SSS: Satin
<input type="checkbox"/> SBB: Satin Brass	<input type="checkbox"/> VGP: Verde Green	<input type="checkbox"/> SNA: Satin Nickel	<input type="checkbox"/> DSS: Distressed
<input type="checkbox"/> PBB: Polished Brass	<input type="checkbox"/> CGP: Charcoal Gray	<input type="checkbox"/> PAA: Polished Aluminum	<input type="checkbox"/> PSS: Polished
<input type="checkbox"/> ANB: Antique Nickel	<input type="checkbox"/> MBP: Medium Bronze	<input type="checkbox"/> BBA: Burnished Bronze	<input type="checkbox"/> HSS: Hammered
<input type="checkbox"/> SNB: Satin Nickel	<input type="checkbox"/> SBP: Satin Black	<input type="checkbox"/> RNA: Red Naval Bronze	
<input type="checkbox"/> PNB: Polished Nickel	<input type="checkbox"/> DBP: Dark Bronze	<input type="checkbox"/> SGA: Satin Gold	
<input type="checkbox"/> AZB: Antique Bronze	<input type="checkbox"/> LBP: Light Bronze	<input type="checkbox"/> SBA: Satin Bronze	
<input type="checkbox"/> SZB: Satin Bronze	<input type="checkbox"/> MGP: Medium Gold	<input type="checkbox"/> ORA: Oil Rubbed Bronze	
<input type="checkbox"/> PZB: Polished Bronze	<input type="checkbox"/> SCP: Sponged Copper	<input type="checkbox"/> SCA: Satin Copper	
<input type="checkbox"/> CSB: Custom Brass*	<input type="checkbox"/> CSP: Custom Paint*	<input type="checkbox"/> CSA: Custom Aluminum*	<input type="checkbox"/> CSS: Custom SS*

<input type="checkbox"/> N250: 250wPar38 Downlight	<input type="checkbox"/> L311: 3-11wCLED Uplight	<input type="checkbox"/> FUS: Fusing
<input type="checkbox"/> N300: 300wPar56 Downlight	<input type="checkbox"/> L611: 6-11wCLED Uplight	<input type="checkbox"/> IEM: Integral Emer.Ballast
<input type="checkbox"/> N500: 500wPar56 Downlight	<input type="checkbox"/> L423: 4-23wCLED Downlight	<input type="checkbox"/> DALI: Dali dimming LED
<input type="checkbox"/> DIM: Dimming Ballast	<input type="checkbox"/> L623: 6-23wCLED Downlight	<input type="checkbox"/> F242: 2-42wCFT Downlight
<input type="checkbox"/> TPL: Top Lens	<input type="checkbox"/> L823: 8-23wCLED Downlight	<input type="checkbox"/> F442: 4-42wCFT Downlight