



Mage

PD-3400~PD-3421

Our Mage fixtures are straight lined blends of cylindrical acrylic and interlocking metal frames. The linear nature of these lights makes them fit easily into spaces with tall ceilings and columns. Take advantage of our various lamping options to get as much light as you need to the floor below. Mage fixtures are available in multiple materials and lampings. The cylinder can be Sea Blue (SBA). The frame can be Polished Brass (PBB). We love making combinations of colors and metals that we have not done before. Go ahead and try to catch us off guard. Use our LED systems for longevity!

~Mage Series~

Chandelier: CH-3400~CH-3411

Pendant: PD-3400~PD-3431

Ceiling Mount: CL-3400~CL-3408

Wall Mount: SC-3400~SC-3411

Bollard: BL-3400~BL-3411

Mounting: Lightsmith fixtures mount to standard 4" octagon electrical boxes unless otherwise specified. All hardware and canopies supplied.

Listing and Warranty: Lightsmith fixtures are Underwriters Laboratories listed and carry a standard three year warranty against defects in materials and labor beginning at date of shipment.



Fixture Specifications

PD-34

FIXTURE NUMBER
(Example: PD-3400)

~

DIFFUSER
(Example: BGA-ECH)

~

METAL FINISH
(Example: ABB)

~

VOLTAGE
 (120V)
 (277V)
 (347V)

~


STEM=S+Lgth
(Example: S-96")
CHAIN=C+Lgth
(Example: C-96")
NR=Not required

~

OPTIONS
(Example: DIM, REM)

~

MODIFICATIONS
(Example: Custom Paint)
Use "Notes" Box At Top To Explain Modifications

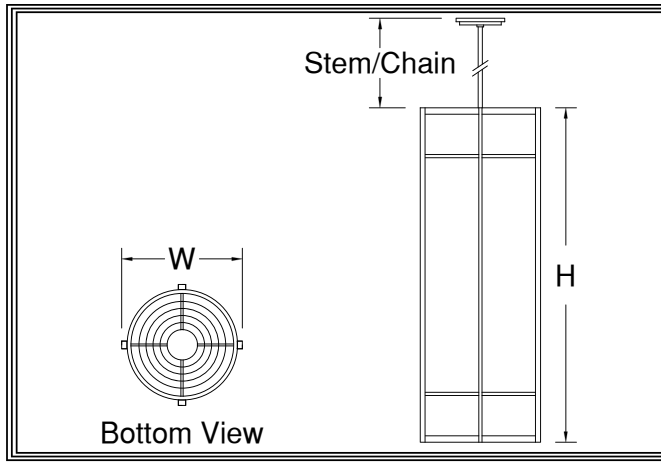

PD-34

Fixture Number

Job Type

Job Name

Notes~Modifications

	Fixture Number	Dimensions	Lamping	Weight	Stem/Chain	Options
LED	<input type="checkbox"/> PD-3409	11w x 20h	2-13wL(2820 lm)	15 lbs	3' Std	IEM, REM, SPR**
	<input type="checkbox"/> PD-3410	13w x 34h	4-13wL(5640 lm)/1-38wC(5734 lm)	20 lbs	6' Std	L313
	<input type="checkbox"/> PD-3411	13w x 38h	6-13wL(8460 lm)/1-38wC(5734 lm)	23 lbs	9' Std	L313
	<input type="checkbox"/> PD-3412	15w x 42h	12-13wL(16920 lm)/1-52wC(9375 lm)	25 lbs	9' Std	L323
	<input type="checkbox"/> PD-3413	15w x 50h	18-13wL(25380 lm)/1-83wC(12597 lm)	32 lbs	12' Std	L323
INCANDESCENT	<input type="checkbox"/> PD-3420	11w x 20h	1-150wA(1200 lm)	13 lbs	3' Std	L38
	<input type="checkbox"/> PD-3400	13w x 34h	3-75wA(3600 lm)/1-250wP38(3600 lm)	16 lbs	6' Std	L52, L310
	<input type="checkbox"/> PD-3421	13w x 38h	6-75wA(7200 lm)/1-250wP38(3600 lm)	18 lbs	9' Std	L52, L610
	<input type="checkbox"/> PD-3401	15w x 42h	6-75wA(7200 lm)/1-500wR40(5000 lm)	21 lbs	9' Std	L83, L610
	<input type="checkbox"/> PD-3402	15w x 50h	9-75wA(10800 lm)/1-500wR40(5000 lm)	27 lbs	12' Std	L83, L910
FLUORESCENT	<input type="checkbox"/>					

~Two Circuits Standard Wiring~

**All LED Fixtures

DIFFUSER	<input type="checkbox"/> BGA: Beige Alabaster Acrylic	<input type="checkbox"/> GRA: Green Edge Acrylic	<input type="checkbox"/> ECH: Etched*
	<input type="checkbox"/> NHA: Natural Horn Acrylic	<input type="checkbox"/> EGA: Earth Green Acrylic	*Etched option creates a matte, non-glossy finish on one side of the diffuser. (Example: WOA-ECH)
	<input type="checkbox"/> WHA: White Alabaster Acrylic	<input type="checkbox"/> DGA: Deep Gold Acrylic	
	<input type="checkbox"/> HNA: Honey Alabaster Acrylic	<input type="checkbox"/> SBA: Sea Blue Acrylic	
	<input type="checkbox"/> WOA: White Opal Acrylic	<input type="checkbox"/> PHA: Purple Haze Acrylic	

	SOLID BRASS FINISHES	PAINTED METAL FINISHES	ALUMINUM FINISHES	STAINLESS STEEL FINISHES
METAL FINISH	<input type="checkbox"/> ABB: Antique Brass	<input type="checkbox"/> DGP: Dark Green	<input type="checkbox"/> SAA: Satin Aluminum	<input type="checkbox"/> SSS: Satin
	<input type="checkbox"/> SBB: Satin Brass	<input type="checkbox"/> VGP: Verde Green	<input type="checkbox"/> SNA: Satin Nickel	<input type="checkbox"/> DSS: Distressed
	<input type="checkbox"/> PBB: Polished Brass	<input type="checkbox"/> CGP: Charcoal Gray	<input type="checkbox"/> PAA: Polished Aluminum	<input type="checkbox"/> PSS: Polished
	<input type="checkbox"/> ANB: Antique Nickel	<input type="checkbox"/> MBP: Medium Bronze	<input type="checkbox"/> BBA: Burnished Bronze	<input type="checkbox"/> HSS: Hammered
	<input type="checkbox"/> SNB: Satin Nickel	<input type="checkbox"/> SBP: Satin Black	<input type="checkbox"/> RNA: Red Naval Bronze	<input type="checkbox"/>
	<input type="checkbox"/> PNB: Polished Nickel	<input type="checkbox"/> DBP: Dark Bronze	<input type="checkbox"/> SGA: Satin Gold	<input type="checkbox"/>
	<input type="checkbox"/> AZB: Antique Bronze	<input type="checkbox"/> LBP: Light Bronze	<input type="checkbox"/> SBA: Satin Bronze	<input type="checkbox"/>
	<input type="checkbox"/> SZB: Satin Bronze	<input type="checkbox"/> MGP: Medium Gold	<input type="checkbox"/> ORA: Oil Rubbed Bronze	<input type="checkbox"/>
	<input type="checkbox"/> PZB: Polished Bronze	<input type="checkbox"/> SCP: Sponged Copper	<input type="checkbox"/> SCA: Satin Copper	<input type="checkbox"/>
	<input type="checkbox"/> CSB: Custom Brass*	<input type="checkbox"/> CSP: Custom Paint*	<input type="checkbox"/> CSA: Custom Aluminum*	<input type="checkbox"/>
				<input type="checkbox"/> CSS: Custom SS*

OPTIONS	<input type="checkbox"/> L38: 38wLED R40 Downlight	<input type="checkbox"/> L313: 3-13wCLEU Uplight	<input type="checkbox"/> SPR: Surge protector
	<input type="checkbox"/> L52: 52wLED R40 Downlight	<input type="checkbox"/> L323: 3-23wCLEU Uplight	<input type="checkbox"/> IEM: Integral Emer. Driver
	<input type="checkbox"/> L83: 83wLED R40 Downlight	<input type="checkbox"/> L310: 3-10wLED A-lamp	<input type="checkbox"/>
	<input type="checkbox"/> DIM: Dimming Driver (std)	<input type="checkbox"/> L610: 6-10wLED A-lamp	<input type="checkbox"/>
	<input type="checkbox"/> REM: Remote Emer. Driver	<input type="checkbox"/> L910: 9-10wLED A-lamp	<input type="checkbox"/>