SC-4110
Antique Brass~ABB
Beige Alabaster Acrylic~BGA

Alkiarad

# Alkiarad

## SC-4100~SC-4111

Our Alkiarad fixtures are stylish combinations of heavy brass rings with embossed filigree, acrylic bowl diffuser lenses, and an assortment of cast canopies, vase caps and arms throughout the various fixture types. The pendant and chandelier versions may be ordered with optional downlights for additional light to the floor below. Acylic bowls are normally shallow profile. Support arms are clean straight rods with key swivels at top for angle adjustments to the main ring. Take advantage of our finish and diffuser options. And remember our LED options for hard-to-get-to places.

### ~Alkiarad Series~

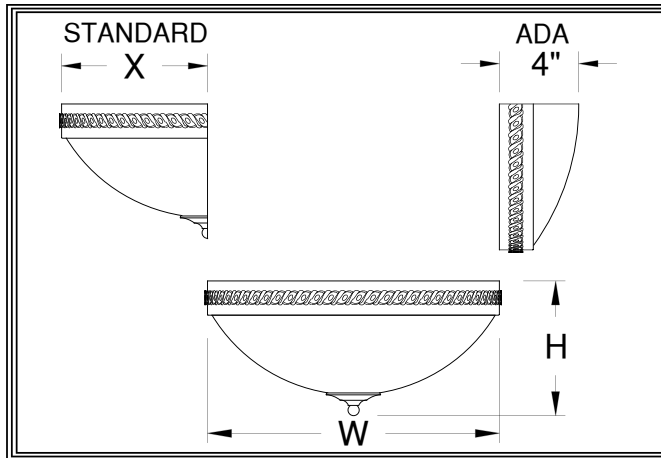| | |
|---|---|
| Chandelier: | CH-4100~CH-4111 |
| Pendant: | PD-4100~PD-4131 |
| Ceiling Mount: | CL-4100~CL-4108 |
| **Wall Mount: SC-4100~SC-4111** | |
| Bollard: | BL-4100~BL-4111 |

**Mounting:** Lightsmith fixtures mount to standard 4" octagon electrical boxes unless otherwise specified. All hardware and canopies supplied.

**Listing and Warranty:** Lightsmith fixtures are Underwriters Laboratories listed and carry a standard three year warranty against defects in materials and labor beginning at date of shipment.

MADE IN USA

## Fixture Specifications

---

SC-41__   Fixture Number   Job Type

Job Name

Notes~Modifications

STANDARD   ADA 4"

X   H   W

| | Fixture Number | Dimensions | Lamping | Weight | Options |
|---|---|---|---|---|---|
| LED | SC-4109 | 16w x 6h x 4x* | 2-13wLLED (2820 lumens) | 7 lbs | L211,TPL |
| | SC-4110 | 20w x 8h x 10x | 3-13wLLED (4230 lumens) | 9 lbs | L213,IEM,TPL |
| | SC-4111 | 24w x 10h x 12x | 4-13wLLED (5640 lumens) | 11 lbs | L223,IEM,TPL |
| | | | | | REM,SPR** |
| INCANDESCENT | SC-4100 | 16w x 6h x 4x* | 2-60wA (1600 lumens) | 4 lbs | TPL |
| | SC-4101 | 20w x 8h x 10x | 3-60wA (2400 lumens) | 6 lbs | TPL |
| | SC-4102 | 24w x 10h x 12x | 4-60wA (3200 lumens) | 8 lbs | TPL |
| FLUORESCENT | | | | | |

*ADA Fixture        ~Single Circuit Standard Wiring~        **All LED Fixtures

### DIFFUSER

| | | | | | |
|---|---|---|---|---|---|
| **BGA:** | Beige Alabaster Acrylic | **GRA:** | Green Edge Acrylic | **ECH:** | Etched* |
| **NHA:** | Natural Horn Acrylic | **EGA:** | Earth Green Acrylic | | |
| **WHA:** | White Alabaster Acrylic | **DGA:** | Deep Gold Acrylic | | |
| **HNA:** | Honey Alabaster Acrylic | **SBA:** | Sea Blue Acrylic | | |
| **WOA:** | White Opal Acrylic | **PHA:** | Purple Haze Acrylic | | |

*Etched option creates a matte, non-glossy finish on one side of the diffuser. (Example:WOA-ECH)

### METAL FINISH

| SOLID BRASS FINISHES | | PAINTED METAL FINISHES | | ALUMINUM FINISHES | | STAINLESS STEEL FINISHES | |
|---|---|---|---|---|---|---|---|
| **ABB:** Antique Brass | | **DGP:** Dark Green | | **SAA:** Satin Aluminum | | **SSS:** Satin | |
| **SBB:** Satin Brass | | **VGP:** Verde Green | | **SNA:** Satin Nickel | | **DSS:** Distressed | |
| **PBB:** Polished Brass | | **CGP:** Charcoal Gray | | **PAA:** Polished Aluminum | | **PSS:** Polished | |
| **ANB:** Antique Nickel | | **MBP:** Medium Bronze | | **BBA:** Burnished Bronze | | **HSS:** Hammered | |
| **SNB:** Satin Nickel | | **SBP:** Satin Black | | **RNA:** Red Naval Bronze | | |
| **PNB:** Polished Nickel | | **DBP:** Dark Bronze | | **SGA:** Satin Gold | | |
| **AZB:** Antique Bronze | | **LBP:** Light Bronze | | **SBA:** Satin Bronze | | |
| **SZB:** Satin Bronze | | **MGP:** Medium Gold | | **ORA:** Oil Rubbed Bronze | | |
| **PZB:** Polished Bronze | | **SCP:** Sponged Copper | | **SCA:** Satin Copper | | |
| **CSB:** Custom Brass* | | **CSP:** Custom Paint* | | **CSA:** Custom Aluminum* | | **CSS:** Custom SS* |

### OPTIONS

| | | | | | |
|---|---|---|---|---|---|
| **L211:** | 2-11wCLED Uplight | **DIM:** | Dimming Driver (std) | **SPR:** | Surge Protector |
| **L213:** | 2-13wCLED Uplight | **IEM:** | Integral Emer.Ballast | **REM:** | Remote Emer. Ballast |
| **L223:** | 2-23wCLED Uplight | **TPL:** | Top Lens | | |

---

| SC-41__ | ~ | DIFFUSER | ~ | METAL FINISH | ~ | VOLTAGE | ~ | NR | ~ | OPTIONS | ~ | MODIFICATIONS |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| FIXTURE NUMBER (Example: SC-4100) | | (Example: BGA-ECH) | | (Example: ABB) | | (120V) (277V) (347V) | | STEM=S+Lgth (Example:S-96") CHAIN=C+Lgth (Example:C-96") NR=Not required | | (Example:DIM,IEM) | | (Example:Custom Paint*) Use "Notes" Box At Top To Explain Modifications |

Lightsmith
www.ltsmth.com

Manufacturers of Fine Custom Lighting ~ Ph:434-528-5809 ~ Fx:434-845-7907 ~ Web:Info@Ltsmth.com

© 2018 Lightsmith

SC-41S