



# Woods Gap

## 2201-PC~2217-PC

Our Woods Gap fixtures will be good friends for many years. The pendants, sconces, and chandeliers of this series are almost oriental in the austerity of design that they represent. We build them with a minimum of materials, just enough to get the job done...without the frills. These lights offer many of the same lamping options we show in less modest fixtures, but in the pendant versions we offer longer than standard cylinder lengths, just right for taller auditoriums. And their friendliness will come from ordering our Long Life Lamping options. Linear fluorescent and LED lampings will keep maintenance to a minimum.

### ~Woods Gap Series~

Chandelier: 2241-CHC~2273-CHC

Pendant: 2201-PC~2217-PC

Ceiling Mount: 2204-CC~2217-CC

Wall Mount: 2201-WC~2213-WC

S-Pendant: 2202-SC~2213-SC

**Mounting:** Lightsmith fixtures mount to standard 4" octagon electrical boxes unless otherwise specified. All hardware and canopies supplied.

**Listing and Warranty:** Lightsmith fixtures are Underwriters Laboratories listed and carry a standard three year warranty against defects in materials and labor beginning at date of shipment.



## Fixture Specifications

22 -PC

FIXTURE NUMBER  
(Example: 2201-PC)

DIFFUSER  
(Example: BGA-ECH)


METAL FINISH  
(Example: ABB)

VOLTAGE  
 (120V)  
 (277V)  
 (347V)

STEM=S+Lgth  
(Example: S-96")  
CHAIN=C+Lgth  
(Example: C-96")  
NR=Not required

OPTIONS  
(Example: DIM,REM)

MODIFICATIONS  
(Example: Custom Paint)  
Use "Notes" Box At Top To Explain Modifications

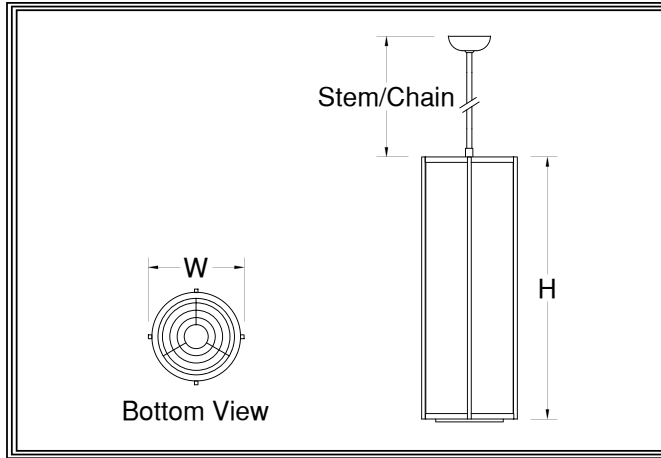

22 -PC

Fixture Number

Job Type

Job Name

Notes~Modifications

	Fixture Number	Dimensions	Lamping	Weight	Stem/Chain	Options
LED	<input type="checkbox"/> 2201-PC	11w x 30h	12-13wLLED	13 lbs	3' Std	DALI,REM,FUS**
	<input type="checkbox"/> 2202-PC	11w x 41h	8-13wLLED/1-38wCLED	21 lbs	6' Std	L423,L623
	<input type="checkbox"/> 2203-PC	11w x 53h	12-13wLLED/1-38wCLED	30 lbs	9' Std	L423,L623,L311
	<input type="checkbox"/> 2204-PC	13w x 64h	24-13wLLED/1-52wCLED	35 lbs	9' Std	L623,L823,L611
	<input type="checkbox"/> 2205-PC	13w x 82h	36-13wLLED/1-52wCLED	44 lbs	12' Std	L623,L823,L611
INCANDESCENT	<input type="checkbox"/> 2208-PC	11w x 30h	6-60wA	10 lbs	3' Std	N250
	<input type="checkbox"/> 2210-PC	11w x 41h	6-60wA/1-250wP38	18 lbs	6' Std	N300
	<input type="checkbox"/> 2212-PC	11w x 53h	9-60wA/1-250wP38	27 lbs	9' Std	N300
	<input type="checkbox"/> 2214-PC	13w x 64h	12-60wA/1-500wR40	32 lbs	9' Std	N500
	<input type="checkbox"/> 2216-PC	13w x 82h	18-60wA/1-500wR40	41 lbs	12' Std	N500
FLUORESCENT	<input type="checkbox"/> 2209-PC	11w x 30h	4-24wT5HO	12 lbs	3' Std	DIM,IEM,REM,FUS*
	<input type="checkbox"/> 2211-PC	11w x 41h	4-39wT5HO/2-42wCFTdn	19 lbs	6' Std	L311
	<input type="checkbox"/> 2213-PC	11w x 53h	4-54wT5HO/2-42wCFTdn	28 lbs	9' Std	L311
	<input type="checkbox"/> 2215-PC	13w x 64h	6-54wT5HO/4-42wCFTdn	33 lbs	9' Std	L611
	<input type="checkbox"/> 2217-PC	13w x 82h	12-39wT5HO/4-42wCFTdn	42 lbs	12' Std	L611

~Two Circuits Standard Wiring~

\*All Fluorescent Fixtures  
\*\*All LED Fixtures

DIFFUSER	<input type="checkbox"/> BGA: Beige Alabaster Acrylic	<input type="checkbox"/> GRA: Green Edge Acrylic	<input type="checkbox"/> ECH: Etched*
	<input type="checkbox"/> NHA: Natural Horn Acrylic	<input type="checkbox"/> EGA: Earth Green Acrylic	*Etched option creates a matte, non-glossy finish on one side of the diffuser. (Example: WOA-ECH)
	<input type="checkbox"/> WHA: White Alabaster Acrylic	<input type="checkbox"/> DGA: Deep Gold Acrylic	
	<input type="checkbox"/> HNA: Honey Alabaster Acrylic	<input type="checkbox"/> SBA: Sea Blue Acrylic	
	<input type="checkbox"/> WOA: White Opal Acrylic	<input type="checkbox"/> PHA: Purple Haze Acrylic	

	SOLID BRASS FINISHES	PAINTED METAL FINISHES	ALUMINUM FINISHES	STAINLESS STEEL FINISHES
METAL FINISH	<input type="checkbox"/> ABB: Antique Brass	<input type="checkbox"/> DGP: Dark Green	<input type="checkbox"/> SAA: Satin Aluminum	<input type="checkbox"/> SSS: Satin
	<input type="checkbox"/> SBB: Satin Brass	<input type="checkbox"/> VGP: Verde Green	<input type="checkbox"/> SNA: Satin Nickel	<input type="checkbox"/> DSS: Distressed
	<input type="checkbox"/> PBB: Polished Brass	<input type="checkbox"/> CGP: Charcoal Gray	<input type="checkbox"/> PAA: Polished Aluminum	<input type="checkbox"/> PSS: Polished
	<input type="checkbox"/> ANB: Antique Nickel	<input type="checkbox"/> MBP: Medium Bronze	<input type="checkbox"/> BBA: Burnished Bronze	<input type="checkbox"/> HSS: Hammered
	<input type="checkbox"/> SNB: Satin Nickel	<input type="checkbox"/> SBP: Satin Black	<input type="checkbox"/> RNA: Red Naval Bronze	<input type="checkbox"/>
	<input type="checkbox"/> PNB: Polished Nickel	<input type="checkbox"/> DBP: Dark Bronze	<input type="checkbox"/> SGA: Satin Gold	<input type="checkbox"/>
	<input type="checkbox"/> AZB: Antique Bronze	<input type="checkbox"/> LBP: Light Bronze	<input type="checkbox"/> SBA: Satin Bronze	<input type="checkbox"/>
	<input type="checkbox"/> SZB: Satin Bronze	<input type="checkbox"/> MGP: Medium Gold	<input type="checkbox"/> ORA: Oil Rubbed Bronze	<input type="checkbox"/>
	<input type="checkbox"/> PZB: Polished Bronze	<input type="checkbox"/> SCP: Sponged Copper	<input type="checkbox"/> SCA: Satin Copper	<input type="checkbox"/>
	<input type="checkbox"/> CSB: Custom Brass*	<input type="checkbox"/> CSP: Custom Paint*	<input type="checkbox"/> CSA: Custom Aluminum*	<input type="checkbox"/>
	<input type="checkbox"/>			<input type="checkbox"/> CSS: Custom SS*
	<input type="checkbox"/>			<input type="checkbox"/>
	<input type="checkbox"/>			<input type="checkbox"/>
	<input type="checkbox"/>			<input type="checkbox"/>

OPTIONS	<input type="checkbox"/> N250: 250wPar38 Downlight	<input type="checkbox"/> L311: 3-11wCLED Uplight	<input type="checkbox"/> FUS: Fusing
	<input type="checkbox"/> N300: 300wPar56 Downlight	<input type="checkbox"/> L611: 6-11wCLED Uplight	<input type="checkbox"/> IEM: Integral Emer.Ballast
	<input type="checkbox"/> N500: 500wPar56 Downlight	<input type="checkbox"/> L423: 4-23wCLED Downlight	<input type="checkbox"/> DALI: Dali dimming LED
	<input type="checkbox"/> DIM: Dimming Ballast	<input type="checkbox"/> L623: 6-23wCLED Downlight	<input type="checkbox"/>
	<input type="checkbox"/> REM: Remote Emer.Ballast	<input type="checkbox"/> L823: 8-23wCLED Downlight	<input type="checkbox"/>
	<input type="checkbox"/>		<input type="checkbox"/>
	<input type="checkbox"/>		<input type="checkbox"/>
	<input type="checkbox"/>		<input type="checkbox"/>