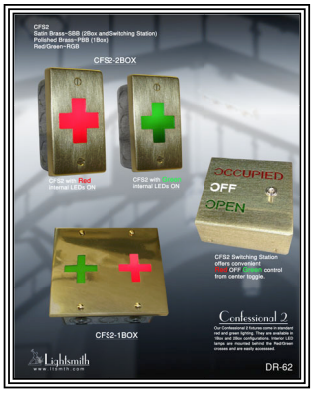

Confessional

CFS2

Our CFS2 confessional lights are a two or three part system composed of a single square lighted frame with double crosses (1BOX) or two smaller rectangular single cross units (2BOX) for the exterior of the confessional, and a control switch for the interior. These lights are normally recessed into the woodwork at top or on the side of the booth. The Switching Station is mounted conveniently for the priest to signal waiting parishioners that the booth is available or not. The CFS2 lighting system is illuminated by LED DC bayonet lamps. Easily accessed for changing.

~CFS2 Series~

Recessed Mt: CFS2

Mounting: Lightsmith fixtures mount to standard 4" octagon electrical boxes unless otherwise specified. All hardware and canopies supplied.

Listing and Warranty: Lightsmith fixtures are Underwriters Laboratories listed and carry a standard three year warranty against defects in materials and labor beginning at date of shipment.

MADE IN USA

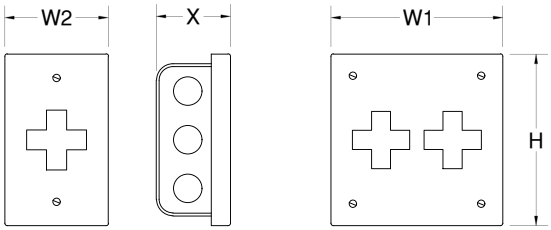

Side View

CFS2
Fixture Number

Job Type

Job Name

Notes~Modifications

	Fixture Number	Dimensions	Lamping	Weight	Options
LED	☐ CFS2 (1BOX)	4.5"w x 4.5"h x 2.5"x	2-3.5wDC bay (700 lumens)	2 lbs	
INCANDESCENT	☐ CFS2 (2BOX)	2.5"w x 4.5"h x 2.5"x	2-3.5wDC bay (700 lumens)	2 lbs	
			~Double Circuit Standard Wiring~		All LED fixtures*

DIFFUSER

☐ **NR:** Not Required

METAL FINISH

SOLID BRASS FINISHES	PAINTED METAL FINISHES	ALUMINUM FINISHES	STAINLESS STEEL FINISHES
☐ **ABB:** Antique Brass	☐ **DGP:** Dark Green	☐ **SAA:** Satin Aluminum	☐ **NA**
☐ **SBB:** Satin Brass	☐ **VGP:** Verde Green	☐ **SNA:** Satin Nickel	
☐ **PBB:** Polished Brass	☐ **CGP:** Charcoal Gray	☐ **PAA:** Polished Aluminum	
☐ **ANB:** Antique Nickel	☐ **MBP:** Medium Bronze	☐ **BBA:** Burnished Bronze	
☐ **SNB:** Satin Nickel	☐ **SBP:** Satin Black	☐ **RNA:** Red Naval Bronze	
☐ **PNB:** Polished Nickel	☐ **DBP:** Dark Bronze	☐ **SGA:** Satin Gold	
☐ **AZB:** Antique Bronze	☐ **LBP:** Light Bronze	☐ **SBA:** Satin Bronze	
☐ **SZB:** Satin Bronze	☐ **MGP:** Medium Gold	☐ **ORA:** Oil Rubbed Bronze	
☐ **PZB:** Polished Bronze	☐ **SCP:** Sponged Copper	☐ **SCA:** Satin Copper	
☐ **CSB:** Custom Brass*	☐ **CSP:** Custom Paint*	☐ **CSA:** Custom Aluminum*	

OPTIONS

Fixture Specifications

CFS2	~	NR	~		~		~	NR	~		~	
FIXTURE NUMBER (Example: CFS2)		DIFFUSER (Example: NR)		METAL FINISH (Example: ABB)		VOLTAGE ☐ (120V) ☐ (277V) ☐ (347V)		STEM=S+Lgth (Example:S-96") CHAIN=C+Lgth (Example:C-96") NR=Not required		OPTIONS (Example:CEM)		MODIFICATIONS (Example:Custom Paint*) Use "Notes" Box At Top To Explain Modifications

Lightsmith
www.ltsmth.com
Manufacturers of Fine Custom Lighting ~ Ph:434-528-5809 ~ Fx:434-845-7907 ~ Web:Info@Ltsmth.com

©2020 Lightsmith