



John Adams

1101-PT~1117-PT

Our John Adams lights are just right for places wanting a display of American craftsmanship with just a splash of color. We hand forge many of the parts here in the shop using standard blacksmith tools. The twisted metal framing and support rods are actually heated to just below critical temperature and then turned into spirals while locked onto our biggest anvil. It's fun for us to reproduce something this special, kind of a trip back into the past when all the best light makers were blacksmiths. The colors you see top and bottom are suggestions. We can put in amber or green or etc.....

~John Adams Series~

Chandelier:1141-CHT~1173-CHT

Pendant:1101-PT~1117-PT

Ceiling Mount:1104-CT~1117-CT

Wall Mount:1101-WT~1113-WT

S-Pendant:1103-ST~1115-ST

Mounting: Lightsmith fixtures mount to standard 4" octagon electrical boxes unless otherwise specified. All hardware and canopies supplied.

Listing and Warranty: Lightsmith fixtures are Underwriters Laboratories listed and carry a standard three year warranty against defects in materials and labor beginning at date of shipment.



Fixture Specifications

11 -PT
FIXTURE NUMBER
(Example: 1101-PT)

~
DIFFUSER
(Example: BGA-ECH)


~
METAL FINISH
(Example: ABB)

~
VOLTAGE
 (120V)
 (277V)
 (347V)

~
STEM=S+Lgth
(Example: S-96")
CHAIN=C+Lgth
(Example: C-96")
NR=Not required

~
OPTIONS
(Example: DIM, REM)

~
MODIFICATIONS
(Example: Custom Paint)
Use "Notes" Box At Top To Explain Modifications

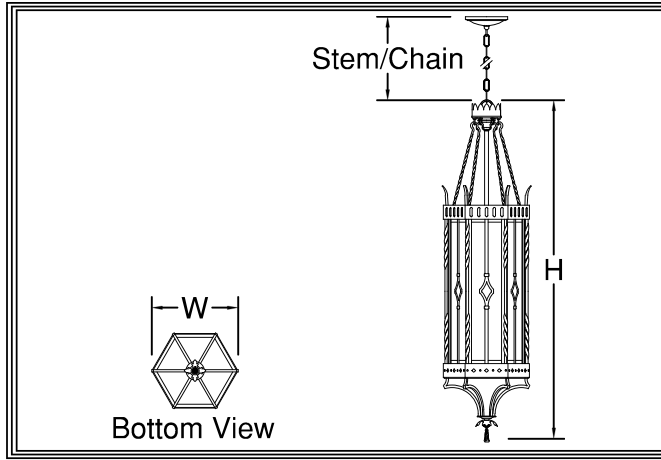

11 -PT
Fixture Number Job Type

Job Name

Notes~Modifications

| | Fixture Number | Dimensions | Lamping | Weight | Stem/Chain | Options |
|--------------|----------------------------------|------------|----------------------|--------|------------|----------------|
| LED | <input type="checkbox"/> 1101-PT | 10w x 30h | 2-13wLLED | 25 lbs | 3' Std | DALI,REM,FUS** |
| | <input type="checkbox"/> 1102-PT | 12w x 39h | 4-13wLLED/1-38wCLED | 29 lbs | 6' Std | L423,L623 |
| | <input type="checkbox"/> 1103-PT | 12w x 47h | 6-13wLLED/1-38wCLED | 35 lbs | 9' Std | L423,L623,L311 |
| | <input type="checkbox"/> 1104-PT | 14w x 55h | 12-13wLLED/1-52wCLED | 41 lbs | 9' Std | L623,L823,L611 |
| | <input type="checkbox"/> 1105-PT | 16w x 63h | 18-13wLLED/1-52wCLED | 48 lbs | 12' Std | L623,L823,L611 |
| INCANDESCENT | <input type="checkbox"/> 1108-PT | 10w x 30h | 1-150wA | 22 lbs | 3' Std | N250 |
| | <input type="checkbox"/> 1110-PT | 12w x 39h | 3-75wA/1-250wP38 | 26 lbs | 6' Std | N300 |
| | <input type="checkbox"/> 1112-PT | 12w x 47h | 6-75wA/1-250wP38 | 32 lbs | 9' Std | N300 |
| | <input type="checkbox"/> 1114-PT | 14w x 55h | 6-75wA/1-500wR40 | 38 lbs | 9' Std | N500 |
| | <input type="checkbox"/> 1116-PT | 16w x 63h | 9-75wA/1-500wR40 | 45 lbs | 12' Std | N500 |
| FLUORESCENT | <input type="checkbox"/> 1109-PT | 10w x 30h | 1-42wCFT | 24 lbs | 3' Std | DIM,IEM,FUS* |
| | <input type="checkbox"/> 1111-PT | 12w x 39h | 2-42wCFT/2-42wCFTdn | 28 lbs | 6' Std | L311 |
| | <input type="checkbox"/> 1113-PT | 12w x 47h | 4-42wCFT/2-42wCFTdn | 34 lbs | 9' Std | L311 |
| | <input type="checkbox"/> 1115-PT | 14w x 55h | 6-FT40w/4-42wCFTdn | 40 lbs | 9' Std | L611 |
| | <input type="checkbox"/> 1117-PT | 16w x 63h | 6-FT50w/4-42wCFTdn | 47 lbs | 12' Std | L611 |

~Two Circuits Standard Wiring~

*All Fluorescent Fixtures
**All LED Fixtures

| | | | |
|----------|---|---|---|
| DIFFUSER | <input type="checkbox"/> BGA: Beige Alabaster Acrylic | <input type="checkbox"/> GRA: Green Edge Acrylic | <input type="checkbox"/> ECH: Etched* |
| | <input type="checkbox"/> NHA: Natural Horn Acrylic | <input type="checkbox"/> EGA: Earth Green Acrylic | *Etched option creates a matte, non-glossy finish on one side of the diffuser. (Example: WOA-ECH) |
| | <input type="checkbox"/> WHA: White Alabaster Acrylic | <input type="checkbox"/> DGA: Deep Gold Acrylic | |
| | <input type="checkbox"/> HNA: Honey Alabaster Acrylic | <input type="checkbox"/> SOG: Streaked Opal Glass | |
| | <input type="checkbox"/> WOA: White Opal Acrylic | <input type="checkbox"/> WOG: White Opal Glass | |

| | SOLID BRASS FINISHES | PAINTED METAL FINISHES | ALUMINUM FINISHES | STAINLESS STEEL FINISHES |
|--------------|---|--|---|-----------------------------|
| METAL FINISH | <input type="checkbox"/> ABB: Antique Brass | <input type="checkbox"/> DGP: Dark Green | <input type="checkbox"/> SAA: Satin Aluminum | <input type="checkbox"/> NA |
| | <input type="checkbox"/> SBB: Satin Brass | <input type="checkbox"/> VGP: Verde Green | <input type="checkbox"/> SNA: Satin Nickel | <input type="checkbox"/> |
| | <input type="checkbox"/> PBB: Polished Brass | <input type="checkbox"/> CGP: Charcoal Gray | <input type="checkbox"/> PAA: Polished Aluminum | <input type="checkbox"/> |
| | <input type="checkbox"/> ANB: Antique Nickel | <input type="checkbox"/> MBP: Medium Bronze | <input type="checkbox"/> BBA: Burnished Bronze | <input type="checkbox"/> |
| | <input type="checkbox"/> SNB: Satin Nickel | <input type="checkbox"/> SBP: Satin Black | <input type="checkbox"/> RNA: Red Naval Bronze | <input type="checkbox"/> |
| | <input type="checkbox"/> PNB: Polished Nickel | <input type="checkbox"/> DBP: Dark Bronze | <input type="checkbox"/> SGA: Satin Gold | <input type="checkbox"/> |
| | <input type="checkbox"/> AZB: Antique Bronze | <input type="checkbox"/> LBP: Light Bronze | <input type="checkbox"/> SBA: Satin Bronze | <input type="checkbox"/> |
| | <input type="checkbox"/> SZB: Satin Bronze | <input type="checkbox"/> MGP: Medium Gold | <input type="checkbox"/> ORA: Oil Rubbed Bronze | <input type="checkbox"/> |
| | <input type="checkbox"/> PZB: Polished Bronze | <input type="checkbox"/> SCP: Sponged Copper | <input type="checkbox"/> SCA: Satin Copper | <input type="checkbox"/> |
| | <input type="checkbox"/> CSB: Custom Brass* | <input type="checkbox"/> CSP: Custom Paint* | <input type="checkbox"/> CSA: Custom Aluminum* | <input type="checkbox"/> |

| | | | |
|---------|--|--|---|
| OPTIONS | <input type="checkbox"/> N250: 250wPar38 Downlight | <input type="checkbox"/> L311: 3-11wCLED Uplight | <input type="checkbox"/> FUS: Fusing |
| | <input type="checkbox"/> N300: 300wPar56 Downlight | <input type="checkbox"/> L611: 6-11wCLED Uplight | <input type="checkbox"/> IEM: Integral Emer.Ballast |
| | <input type="checkbox"/> N500: 500wPar56 Downlight | <input type="checkbox"/> L423: 4-23wCLED Downlight | <input type="checkbox"/> DALI: Dali dimming LED |
| | <input type="checkbox"/> DIM: Dimming Ballast | <input type="checkbox"/> L623: 6-23wCLED Downlight | <input type="checkbox"/> |
| | <input type="checkbox"/> REM: Remote Emer.Ballast | <input type="checkbox"/> L823: 8-23wCLED Downlight | <input type="checkbox"/> |